




Aluette sliding gate

During the design of the Aluette sliding gate special attention was paid to the purity of the lines. Simple, elegant and with an eye for detail. The motorization of the sliding gate has been integrated in the lower beam and the filling of the wing can be adapted to your wish.

The Aluette sliding gate is available in several varieties, each having a distinct and unique character. This way, the Aluette sliding gate fits perfectly with any style of home.

For each variant of the Aluette sliding gate, a matching swing gate is available. This can be placed in addition to the sliding gate or can be used separately.

Aluette

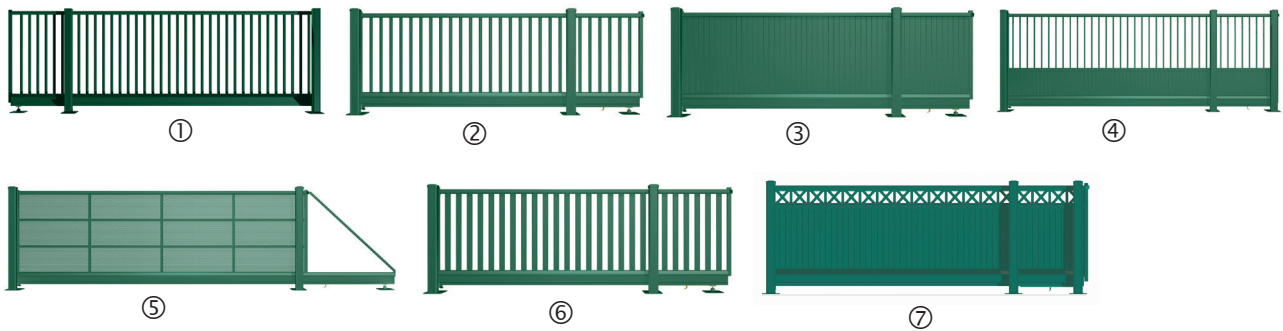

Posts & frame

The posts for the Aluette swing gate are square tubular profiles made of aluminum measuring 120/140/3 mm, with an aluminum cover and a footplate measuring 275/350/12 mm. The frame of the Aluette swing gate is made of an aluminum lower beam of 210/128 having a thickness of 3 to 4 mm, an upper beam of 108/55 mm having a thickness of 3 to 4 mm. It is filled with bars, lamellae or perforated aluminum plate.

Finish

Pretreatment: degreasing, chemical scouring and chromatising. Then coated with a polyester powder coating in a standard Kopal colour. Other colours are available on demand. All accessories are made of inox or aluminum.

Fillings

- ① Standard square bars of 26/26/1.6 mm at a distance of 15 cm a.o.a.
- ② Romance bars: the Romance bars offer a very high rigidity and give the Aluette sliding gate a beautiful, decorative look. To be advised for gates higher than 1.80 m.
- ③ Lamellae: With concatenated lamellae, the Aluette sliding gate offers an optimal privacy. The lamellae have a tongue and groove system, which makes them fit perfectly. Dimensions of the lamellae: 80 x 25 mm. A second guidance post is added for a

better stability.

- ④ Combined filling: lamellae and bars. Aluette sliding gate with a combination of 1/3 concatenated lamellae and 2/3 bars. The lamellae are placed at the bottom and the bars on top, giving the gate a stylish and modern look. For the bars, one can choose between standard square bars or Romance bars.
- ⑤ Perforated plate. By using perforated aluminum plates, one can obtain a modern touch in the fence, whilst providing a visual protection. You can choose between two versions: round perforations or square perforations (R10 T15 or C8 U24). The Aluette sliding gate with aluminum perforated plate has a traction rod at the rear end.
- ⑥ Distance: The gate is filled with lamellae of 80 x 20 mm, that are placed at a distance of 15 mm of each other, thus creating a half open protection. This guarantees the privacy.
- ⑦ Cross: The Aluette Cross is a combination of concatenated lamellae and aluminum crosses on top. This way you get an elegant gate with reference to a filling type that is frequently used for wooden gates.

Standard heights (m)	Standard passages (m)
1.00	3.00
1.20	3.50*
1.50	4.00
1.80	5.00**
2.00	

* = Not for Aluette Distance

** = Not for Aluette with lamellae

STANDARD COLOURS	RAL CODE
moss green	RAL 6005
pine green	RAL 6009
stone gray	RAL 7030
quartz gray	RAL 7039
anthracite gray	RAL 7016
pure white	RAL 9010
brilliant black	RAL 9005bl
mat black	RAL 9005m
Other colours on demand	
Shown colours can differ from the true colours. Always use colour samples to choose your colour.	

Kopal NV/SA
Ieperstraat 75A
8610 Kortemark

+32 (0) 51 57 09 00
+32 (0) 51 57 09 88
info@kopal.be

Product sheet Aluette sliding gate EN 03-2018

Your Distributor: