





### *Aluette Twister sliding gate*

The youngest member of the Aluette family is the Aluette Twister sliding gate. The filling of this modern gate consists of three equally sized modules that can be filled to your choice. Horizontal or vertical lamellae, with or without gaps... dozens of combinations are possible. The result is a unique gate that fully fits your personality and home.

Like all other Aluette variants, the Aluette Twister sliding gate is built from aluminum profiles with integrated motorization and control unit.

# Aluette Twister

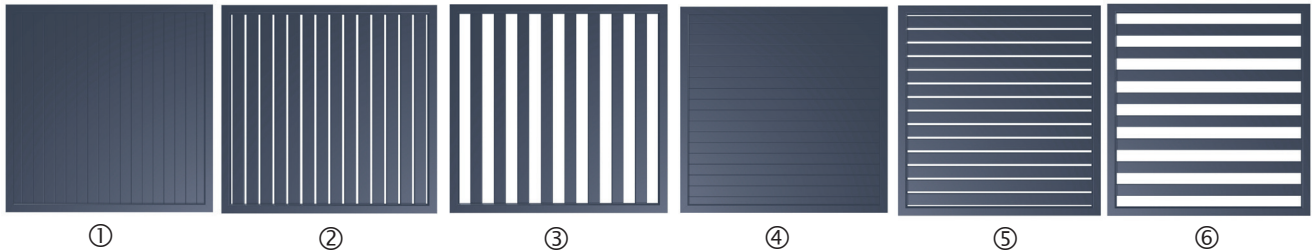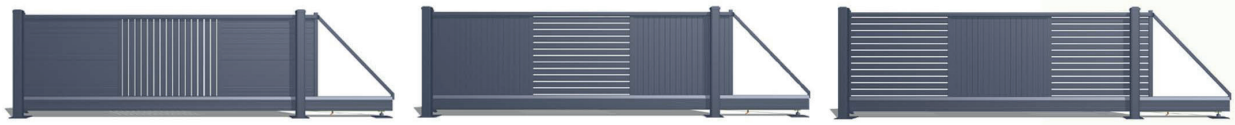

## Posts & frame

The posts for the Aluette swing gate are square tubular profiles made of aluminium measuring 120/130/3 mm, with an aluminium cover and a footplate measuring 275/350/12 mm. The frame of the Aluette swing gate is made of an aluminium lower beam of 210/128 having a thickness of 3 to 4 mm, an upper beam of 108/55 mm having a thickness of 3 to 4 mm. It is filled with modules at choice (see below for a description of the modules).

## Finish

Pretreatment: degreasing, chemical scouring and chromatising. Then coated with a polyester powder coating in a standard Kopal colour. Other colours are available on demand. All accessories are made of inox or aluminium.

## Modules

- ① Distance 00 Vertical module: The lamellae measure 80 x 25 mm and are attached to each other with a tongue and groove system. The lamellae are mounted vertically without gaps.

- ② Distance 15 Vertical module: The lamellae measure 80 x 20 mm and are mounted vertically with a gap of 15 mm between them.
- ③ Distance 80 Vertical module: The lamellae measure 80 x 20 mm and are mounted vertically with a gap of 80 mm between them.
- ④ Distance 00 Horizontal module: The lamellae measure 80 x 25 mm and are attached to each other with a tongue and groove system. The lamellae are mounted horizontally without gaps.
- ⑤ Distance 15 Horizontal module: The lamellae measure 80 x 20 mm and are mounted horizontally with a gap of 15 mm between them.
- ⑥ Distance 80 Horizontal module: The lamellae measure 80 x 20 mm and are mounted horizontally with a gap of 80 mm between them.

Standard heights Aluette Twister (m)	Standard passages Aluette Twister (m)
1.00	3.00
1.20	3.50
1.50	4.00
1.80	5.00
2.00	

STANDARD COLOURS	RAL CODE	
moss green	RAL 6005	
pine green	RAL 6009	
stone gray	RAL 7030	
quartz gray	RAL 7039	
anthracite gray	RAL 7016	
pure white	RAL 9010	
brillant black	RAL 9005bl	
mat black	RAL 9005m	
Other colours on demand		
Shown colours can differ from the true colours. Always use colour samples to choose your colour.		

Kopal NV/SA  
Ieperstraat 75A  
8610 Kortemark

+32 (0) 51 57 09 00  
+32 (0) 51 57 09 88  
info@kopal.be

Product sheet Aluette Twister EN 03-2018

Your Distributor: