




### *Jumila bar fence*

The Jumila bar fence is constructed from a steel frame with welded vertical bars. The fence radiates robustness and safety. Jumila is highly resistant to vandalism and is difficult to climb. In Jumila, ornamental rings made of flat steel are welded in between the bars and are finished with a flat metal strip under the rings. The bars pass through the horizontal beams and are chamfered by 45° on top. Jumila is in fact a combination of the Traversa and Rondo versions. This gives Jumila a very elegant look. The steel frames are attached to the posts with fixing plugs and rods. The horizontal beams have a tunnel-like profile, which evacuates water in an easy way and prevents dust accumulation.

The Jumila bar fence is fully galvanized and has a polyester powder coating. This way, the fence has a high resistance against corrosion. Moreover, the colour of the fence can be chosen in a way that the fence fits perfectly in the environment. Kopal offers a number of standard colours, but it is also possible to choose an own, specific RAL color for the Jumila bar fence.

# Jumila bar fence

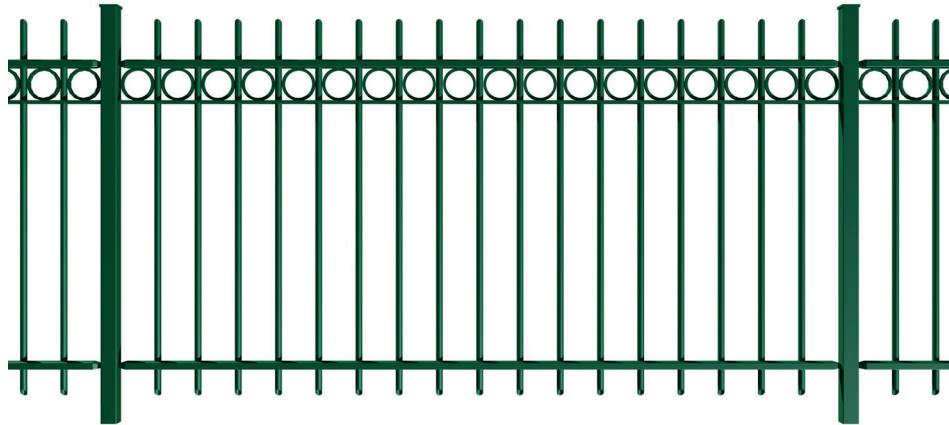

## Posts


The posts are made of steel profiles of 60/60/2 mm and are placed at a distance of 2.75 meters (axis on axis) of each other. They are finished with a plastic cap on top. In each post 2 holes are predrilled to insert the fixing rods. There are two fixation systems: a blind plastic connection with bolt and nut or connection rings with plastic endcaps and stainless steel rings.

## Jumila panels

The Jumila panels are made of two tunnel-shaped profiles of 50/30/25 mm, and round bars between them at an interleave of 15 cm (a.o.a.). In Jumila, ornamental rings made of flat steel are welded in between the bars and are finished with a flat metal strip under the rings. The bars pass through the horizontal beams and are chamfered by 45° on top. The rounded side of the tunnel profiles is directed upwards. The diameter of the bars depends on the height of the Jumila panel. The Jumila panels are galvanized and can have a polyester coating in a standard Kopal colour. Other colours are available on demand.

Panel height (m)	Post length (m)	Post on base length (m)
1.00	1.80	1.05
1.25	2.05	1.30
1.50	2.30	1.55
1.80	2.60	1.85
2.00	2.80	2.05
2.50	3.30	2.55

STANDARD COLOURS	RAL CODE	
moss green	RAL 6005	
pine green	RAL 6009	
stone gray	RAL 7030	
quartz gray	RAL 7039	
anthracite gray	RAL 7016	
pure white	RAL 9010	
brilliant black	RAL 9005bl	
mat black	RAL 9005m	
Other colours on demand		
Shown colours can differ from the true colours. Always use colour samples to choose your colour.		

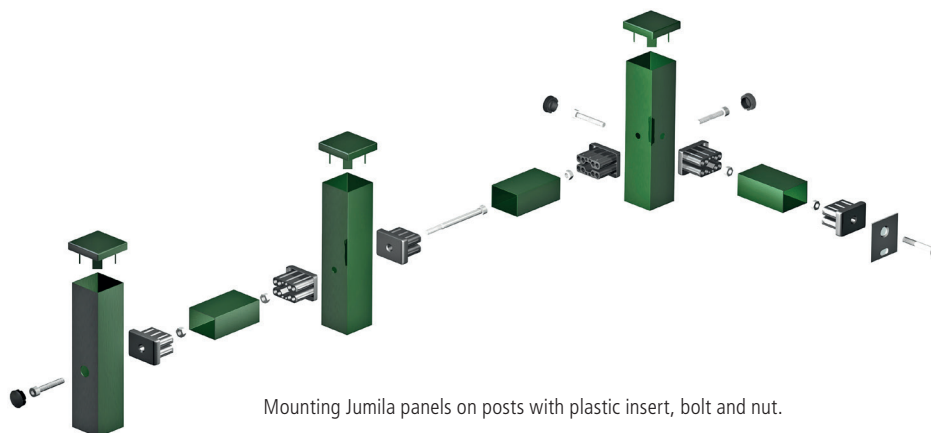

Mounting Jumila panels on posts with plastic insert, bolt and nut.

Kopal NV/SA  
Ieperstraat 75A  
8610 Kortemark

+32 (0) 51 57 09 00  
+32 (0) 51 57 09 88  
info@kopal.be

Product sheet Jumila bar fence EN 03-2018

Your Distributor: